

0.0.0

BabyFold



BabyFold is a unique off-line folder, designed to fold at high speed wide format documents **automatically** and at **competitive cost**.

This versatile product offers a wide range of programs and support a variety of paper weight to fold brochures, letters, leaflet or maps as additional feature to fan and cross fold technical drawings providing outstanding fold quality

Flexibility meets Innovation


- Versatile professional finishing equipment for print shops and engineering offices.
- This folder optimizes the user's job by folding a wide variety of documents, either CAD or Graphics
- Babyfold can perfectly fold any technical drawing meeting any worldwide fold standard.



Main Characteristics

- ✓ Fast with outstanding fold precision
- ✓ **Unlimited** fan folded length by module of 4 meters
- Cross folding up to 6 folds, 914 mm (36") media width 3 folds and thickness up to 8 panels.
- ✓ Special Fold programs: such as A4 TriFold and MapFold and a wide fold-panel range 95-420 mm
- Customizable folding programs for special requirements
- ✓ Plug & play, easy to use & maintain
- ✓ Exceptional price/performance ratio
- ✓ Silent operation: 59 dBa
- ✓ Extremely reliable

Special Programs

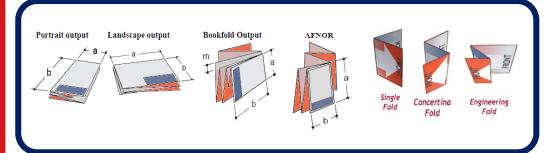



Features

Speed 12 m/min 9 A0/min 8" /sec 8 E/min

Process

0.0.0

Length and cross folding in two working steps

8 Fan Fold programs:

P1 210x297 mm P2 190x297 mm P3 190+ margin x 297 mm P4 Tri-Fold: A4 99x3 times (Special Program) P5 210x305 mm P6 297 mm Afnor (FAN) P7 210 CROSS Inverse din P8 MapFold 105x8 times (Special Program)

Panel width: 95 - 420 mm

Cross fold programs

297 / 300 / 305 mm Cross fold width:100 - 420 mm Cross fold length: 8 panels

Weight

with stand:

folder:

20mm,190mm 190mm 210mm

Document Length 410 mm module of 4 meters for unlimited plot length

Technical Specifications

Document Width

min:

max:

minimal: 270 mm maximal: 920 mm

Paper weights

Special Program: 60-160 g/m² Standard: 75-90 g/m²

Dimensions

Depth	290+340 mm
Width	1135 mm
Height	420 mm
with stand	1000 mm

More info:http://www.gera.it/en/babyfold

Reseller				
	ent friendly	Safety		

GERA srl Strada Del Cascinotto 132 Torino I-10156 ITALY +39 011 223.91.37 Ph. +39 011 273.56.45 Fax Email: welcome@gera.it Web site: www.gera.it

WEEE





The information contained herein is subject to change without notice. The only warranties for GERA products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. GERA shall not be liable for technical or editorial errors or omissions contained herein. Rev March. 2014



65 Kg

78 Kg

Electrical requirement

230V-0.8A / 115V-1.6A

50 Hz /60 Hz 120 W

91XOL

ENENED E



352

59

0.3.2 1=2,83m